

Simple solutions made to your home's configuration

Our range of standard access ramp have smooth moulded sides and upstands, antislip surface in colours contrasting and the option to be fitted with single or double handrails.

The form the basis of our modular system which allows ramps to be used alone or in a variety of combinations to achieve different gradients and heights and to overcome more complex access issues.

SWL : 320 KG

- Access ramps**

Standard access ramps



Ramp type	Lenght	Width		Weight
		internal	overall	
411 001	610 mm / 2 ft	800 mm / 31½"	895 mm / 35¼"	6,5 kg
411 002	910 mm / 3 ft	800 mm / 31½"	895 mm / 35¼"	10 kg
411 003	1220 mm / 4 ft	800 mm / 31½"	895 mm / 35¼"	15,5 kg
411 004	1525 mm / 5 ft	800 mm / 31½"	895 mm / 35¼"	17 kg
411 005	1830 mm / 6 ft	800 mm / 31½"	895 mm / 35¼"	20 kg
411 006	2133 mm / 7 ft	800 mm / 31½"	895 mm / 35¼"	23 kg
411 007	2440 mm / 8 ft	800 mm / 31½"	895 mm / 35¼"	30 kg

Standard access ramps with single handrail



Ramp type	Lenght	Width		Weight
		internal	overall	
411 120	1220 mm / 4 ft	800 mm / 31½"	960 mm / 37¾"	19 kg
411 121	1525 mm / 5 ft	800 mm / 31½"	960 mm / 37¾"	21 kg
411 122	1830 mm / 6 ft	800 mm / 31½"	960 mm / 37¾"	23 kg
411 123	2133 mm / 7 ft	800 mm / 31½"	960 mm / 37¾"	26,5 kg
411 124	2440 mm / 8 ft	800 mm / 31½"	960 mm / 37¾"	34 kg

Standard access ramps with double handrail



Ramp type	Lenght	Width		Weight
		internal	overall	
411 230	1220 mm / 4 ft	800 mm / 31½"	1030 mm / 40½"	17 kg
411 231	1525 mm / 5 ft	800 mm / 31½"	1030 mm / 40½"	19 kg
411 232	1830 mm / 6 ft	800 mm / 31½"	1030 mm / 40½"	21 kg
411 233	2133 mm / 7 ft	800 mm / 31½"	1030 mm / 40½"	24 kg
411 234	2440 mm / 8 ft	800 mm / 31½"	1030 mm / 40½"	31 kg
411 250	2400 mm / 8 ft	1200 mm / 47¼"	1430 mm / 56½"	60 kg

• **Platforms for standard access ramps**

All platforms are fitted as standard with adjustable feet giving a height range of 140 mm to 260 mm. Greater heights are achieved by fitting extension legs as shown below.

90° corner platform



Ramp type	Lenght	Width		Weight
		internal	overall	
412 010	1240 mm / 4 ft	1220 mm / 4 ft	1240 mm / 4 ft	25 kg
412 030	1550 mm / 5 ft	1500 mm / 4,9 ft	1550 mm / 5 ft	26 kg

Use of a universal corner platform allows access ramps to lead either to the left or right side of the doorway or entrance.

Bottle neck platform




Ramp type	Lenght	Width		Weight
		internal	overall	
412 050	1310 mm / 5 ft	1140 mm / 4 ft	1450 mm / 5 ft	23 kg

The bottle neck platform enables a straight run of ramps in front of an entrance.

Corner platform

Straight platform 1200 mm

Straight platform 600 mm

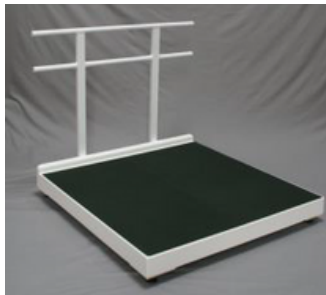

Ramp type	Lenght	Width		Weight
		internal	overall	
412 250	1240 mm / 4 ft	1090 mm / 3,6 ft	1240 mm / 4 ft	30 kg
412 350	1240 mm / 4 ft	1090 mm / 3,6 ft	1090 mm / 3,6 ft	23 kg
412 352	1500 mm / 5 ft	1450 mm / 5 ft	1500 mm / 5 ft	45 kg
412 450	600 mm / 2 ft	1090 mm / 3,6 ft	1240 mm / 4 ft	13 kg


• Platforms accessories

Joining plinth




Using adjustable height joining plinth enables multiple standard ramps to be joined together to form a longer run.

Ramp infill plate

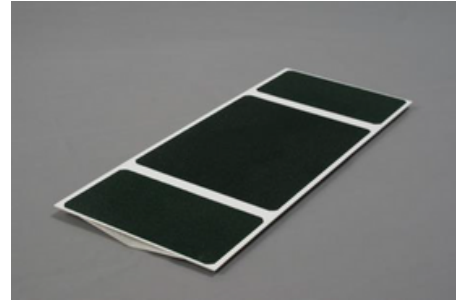

Ramp infill plates ensure a smooth level transition from one ramp to another.


Platform extension legs

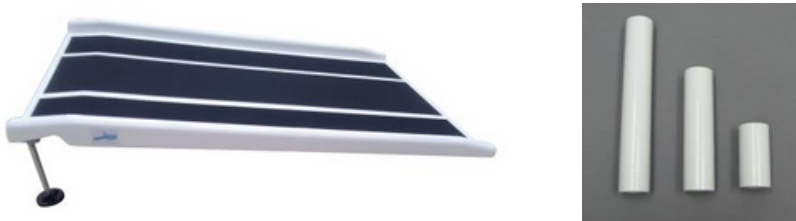

An assortment of different height leg extensions allows platforms to be set at different heights. They allow for location over steps and other objects where there is no level surface to position the platform.

Ramp type	Length	Weight
451 230	+100 mm	0,5 kg
451 231	+150 mm	0,75 kg
451 232	+200 mm	1 kg

Platform threshold bridge plate

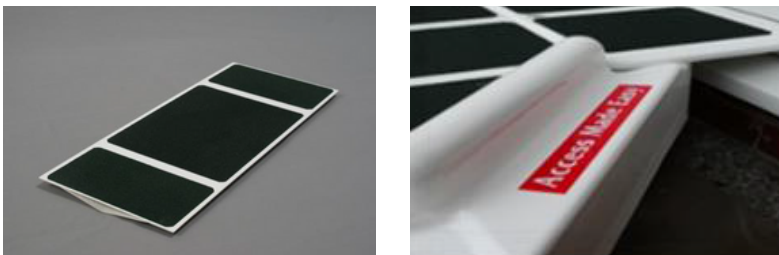

Bridge plates allow flush positioning of platforms where door sills extend beyond the threshold.

Ramp type	Length	Width	Weight
451 201	230 mm	900 mm / 3 ft	2 kg

Platform joining section



A 180° turn can be created using two corner platforms; a joining section ensures they have a level join.

Ramp type	Length	Width		Weight
		internal	overall	
451 205	230mm	800 mm / 3 ft	895 mm / 3 ft	3,5 kg

Platform door



Platform steps



• Handrails accessories

Handrail end loop




A looped end fitted with 2 simple socket key screws provides a smooth safe ending to the handrails.

Handrail connecting tube



Using connection tubes, handrails can easily be joined to give a smooth continuous rail.

Handrail wall mounting

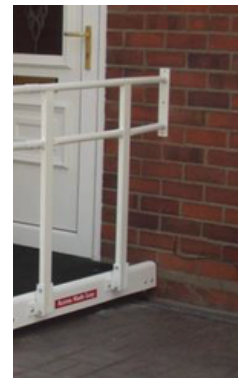

Wall mounted plates give a rigid fixing point when handrails end near to buildings.

Bespoke service



Although our standard range of ramps has been designed to be as versatile as possible there will always be the need for custom made ramps and systems.

Our bespoke service meets this need. Variations to ramp and platform sizes, the addition of access steps, and colour can be modified to provide the perfect system.



45 avenue Georges Politzer - Z.A de Trappes-Élancourt 78190 TRAPPES
Tél : +33 1 85 83 02 10 - Fax : +33 1 30 57 55 02 - Email : export@axsol.fr

www.axsol-export.eu

“ Solutions for your access issues ”

Jetmarine's versatile range of portable folding ramps are designed to be easily handled, quickly located for use and neatly folded for storage.

Smooth corners prevent damage to upholstery when sliding in and out of vehicles.

Simple latches and handles are fitted for ease of use and transport of the ramps.

SWL : 320 KG

Maxi gradient is 1/12 in autonomy 1/6 with assistance

Shop Ramp



Ramp type	Length	Width		Weight
		internal	overall	
415 408	900 mm / 3 ft	710 mm / 28"	780 mm / 30¾"	6 kg
415 420	1200 mm / 4 ft	760/840 - 30"/33"	840/920 - 33"/36½"	9 kg
415 435	1500 mm / 5 ft	760/840 - 30"/33"	840/920 - 33"/36½"	12 kg
415 440	1830 mm / 6 ft	750/800 - 29½"/31½"	840/920 - 33"/36½"	15 kg

Travel Ramp



Ramp type	Length	Internal width	Overall width	Weight
415 305	700 mm / 2'3"	740 mm / 29"	780 mm / 30¾"	5 kg

Briefcase Ramp



Ramp type	Length	Width		Weight
		internal	overall	
415 030	914 mm / 3 ft	736 mm / 29"	840 mm / 33"	7 kg
415 032	1370 mm / 4 ft 5"	736 mm / 29"	840 mm / 33"	11 kg
415 034	1830 mm / 6 ft	736 mm / 29"	840 mm / 33"	15 kg

Chanel Ramp



Ramp type	Length	Width		Weight
		internal	overall	
414 120	1830 mm / 6 ft	203 mm / 8"	292 mm / 11½"	12,5 kg/pair
414 123	2440 mm / 8 ft	203 mm / 8"	300 mm / 11¾"	20 kg/pair

Scooter Ramp



Ramp type	Length	Width		Weight
		internal	overall	
415 110	1220 mm / 4 ft	622 mm / 24½"	710 mm / 28"	9 kg
415 111	1525 mm / 5 ft	622 mm / 24½"	710 mm / 28"	11 kg
415 112	1830 mm / 6 ft	622 mm / 24½"	710 mm / 28"	13 kg
415 130	1830 mm / 6 ft	710 mm / 28"	812 mm / 32"	14 kg

Split Scooter Ramp



Ramp type	Length	Width		Weight
		internal	overall	
415 220	1830 mm / 6 ft	610 mm / 24½"	690 mm / 28"	13 kg
415 222	1830 mm / 6 ft	760 mm / 30"	840 mm / 33"	14 kg



☞ Solutions for your access issues ☞

Where access is restricted by door threshold and small steps, our range offers a quick and simple solution.


By cutting to different depths and trimming the profile cutting a perfect fit can be achieved.

SWL : 320 KG

Maxi gradient is 1/12 in autonomy and 1/6 with assistance


- Standard threshold ramps

Standard door threshold ramps



Ramp type	Height	Lenght	Width		Weight
			internal	overall	
416 008	50 mm / 1"31	457 mm / 18"	730 mm / 28¾"	781 mm / 30¼"	3,5 kg
416 010	75 mm / 2 15/16"	457 mm / 18"	730 mm / 28¾"	781 mm / 30¼"	4 kg
416 012	100 mm / 3"15	457 mm / 18"	730 mm / 28¾"	781 mm / 30¼"	4,5 kg
416 014	125 mm / 4"29	457 mm / 18"	730 mm / 28¾"	781 mm / 30¼"	5,5 kg
416 120	150 mm / 5"29	914 mm / 36"	737 mm / 29"	820 mm / 32¼"	8,5 kg

Flared door threshold ramps




Ramp type	Height	Lenght	Width		Weight
			internal	overall	
416 331	50 mm / 1"31	450 mm / 17¾"	610 mm / 24"	1450 mm / 57"	4 kg
416 330	75 mm / 2 15/16"	450 mm / 17¾"	610 mm / 24"	1450 mm / 57"	5 kg
416 332	100 mm / 3"15	450 mm / 17¾"	610 mm / 24"	1450 mm / 57"	6 kg
416 334	125 mm / 4"29	450 mm / 17¾"	610 mm / 24"	1450 mm / 57"	7 kg

Folding threshold ramps

There is often the need to bridge a door threshold when wheelchair tyres might damage door running gear. The folding threshold ramp overcomes this problem with ease.

Adjustable leg heights and various ramp length options accommodate a variety of doorway access problems.

The ramp, when not in use, folds neatly for storage.

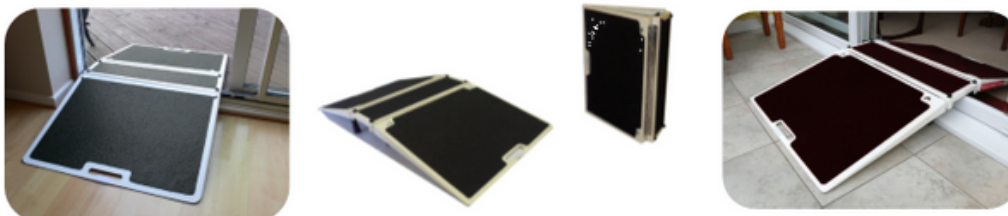

Ramp type	Height	Length (per pannel)	Width		Weight
			internal	overall	
416 401	75 to 150 mm / 2 15/16" to 5"29	510 mm / 20"	622 mm / 24½"	660 mm / 26"	8 kg
416 402	75 to 150 mm / 2 15/16" to 5"29	760 mm / 30"	622 mm / 24½"	660 mm / 26"	11 kg
416 403	75 to 150 mm / 2 15/16" to 5"29	510 mm / 20"	722 mm / 28½"	760 mm / 30"	8,5 kg
416 404	75 to 150 mm / 2 15/16" to 5"29	760 mm / 30"	722 mm / 28½"	760 mm / 30"	13,5 kg

• Customized threshold ramps

In some cases, custom-made solutions are required.

On the basis of measurements and photos of the project, our design office will create your custom-made ramp, perfectly adapted to the constraints of the threshold crossing.

